



PART NUMBER	HIGHTS	APPROX. LBS
1212x6	6"	150
1212x12	11"	250
1212-B12 OPEN	12"	275
1212-B12F	16"	350

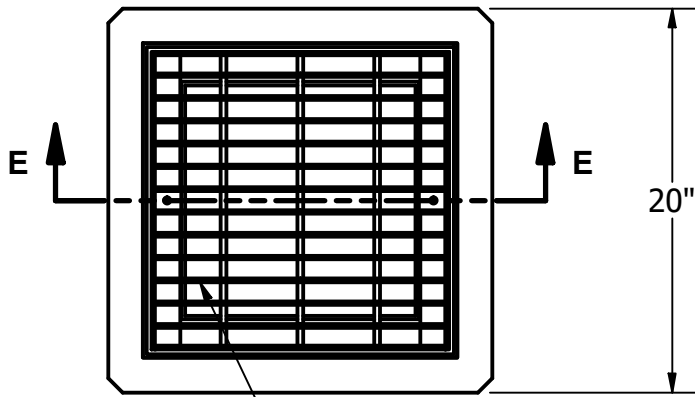


**FRAME AND GRATE**

STANDARD: GALVANIZED STEEL TRAFFIC RATED.  
OPTIONAL: ADA, HIGH HEEL PROOF, SOLID COVER, CAST IRON PARKWAY OR TRAFFIC.

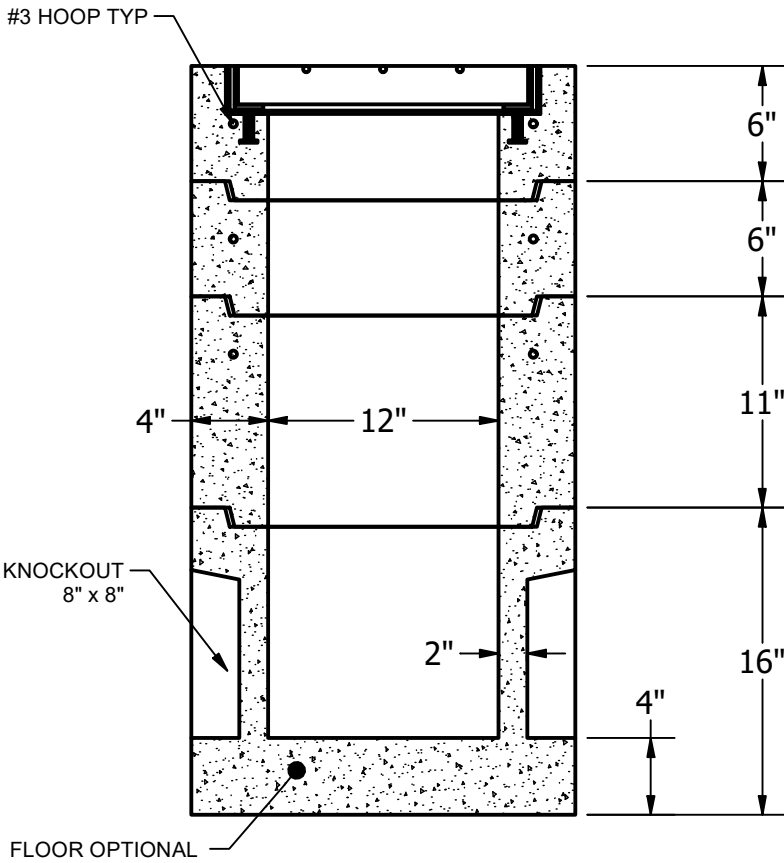

**SECTION A-A**

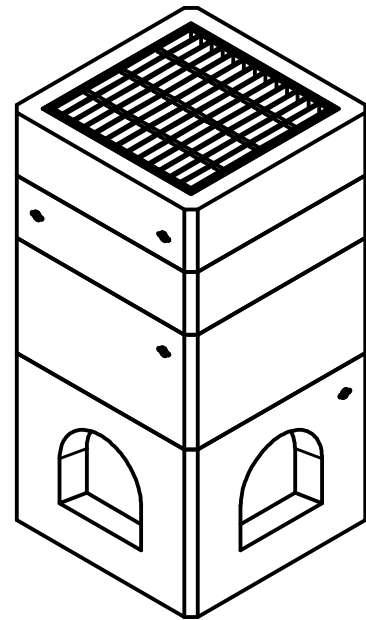

ISOMETRIC VIEW

1. ALL DIMENSIONS ARE IN DECIMAL INCHES.
2. PRECAST MATERIALS AND MANUFACTURING METHODS SHALL CONFORM TO ASTM C-913.
3. BOX DESIGN LOAD H-20 TRAFFIC.
4. CONCRETE SHALL HAVE A MINIMUM COMPRESSIVE STRENGTH F C= 4000 PSI AT 28 DAYS.
5. THE PORTLAND CEMENT USED IN THE PRECAST SECTIONS SHALL MEET THE REQUIREMENTS OF TYPE II/V HIGH SULFATE RESISTANT CEMENT IN ACCORDANCE WITH ASTM C-150.



240 W. LOS ANGELESE AVE. SIMI VALLEY, CA 93065  
P: (805) 527-0841 F: (805) 584-0769,  
WWW.PRE-CONPRODUCTS.COM

THE CONTENTS OF THESE DRAWINGS ARE THE PROPERTY OF PRECON PRODUCTS AND ARE PROPRIETARY AND CONFIDENTIAL. THESE DOCUMENTS SHALL NOT BE DISSEMINATED FOR ANY OTHER USE, WITHOUT THE WRITTEN CONSENT OF PRECON PRODUCTS. IF YOU RECEIVE THESE DRAWINGS IN ERROR, RETURN TO SENDER WITHOUT READING, COPYING OR DISCLOSING THE CONTENTS.

DRAWN BY:  
W.Tack  
DATE:  
7/2/2021

TITL:

CATCH BASIN 12" x 12"  
STANDARD

SHEETS:

1 OF 1

DO NOT SCALE