



ID	А	В	С	D	E	WALL TYPE	D-LOAD CLASS	STEEL INNER/OUTER		WEIGHT
42"	8'	7'-11 3/8"	4'-3"	3'-11"	4 1/2"	В	CL III	.21	.12	5,500 lbs
42"	8'	7'-11 3/8"	4'-3"	3'-11"	4 1/2"	В	CL IV	.35	.21	5,500 lbs
42"	8'	7'-11 3/8"	4'-3"	3'-11"	4 1/2"	В	CL V	.60	.36	5,500 lbs

^{*} STEEL USED WILL MEET OR EXCEED ASTM C76

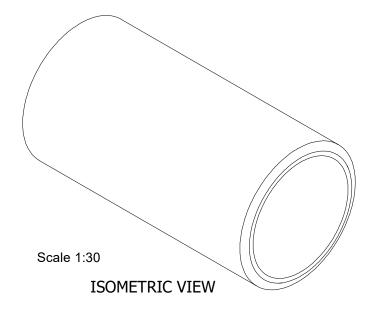



TOUNGE AND GROOVE JOINT DETAIL

- 1. ALL DIMENSIONS SUBJECT TO ALLOWABLE SPECIFICATION TOLERANCES AND PARAMETERS. 2. STEEL WWM ASTM A-497, REINFORCING PER ASTM-C76.
- 3. PIPE IS MANUFACTURED PER ASTM C-76, AND CONFORMS TO 2018 CALTRANS STANDARD SPECIFICATION SECTION 65-2 REINFORCED CONCRETE PIPE.
- 4. CONCRETE F'c = 6000 PSI @ 28 DAYS



WWW.PRE-CONPRODUCTS.COM

THE CONTENTS OF THESE DRAWINGS
ARE THE PROPERTY OF PRECON PRODUCTS
AND ARE PRORIETARY AND CONFIDENTIAL.
THESE DOCUMENTS SHALL NOT BE
DISSMINATED FOR ANY OTHER USE,
WITHOUT THE WRITTEN CONSENT OF
PRECON PRODUCYS. IF YOU RECEIVE
THESE DRAWINGS IN ERROR, RETURN
TO SENDER WITHOUT READING, COPYING
OR DISCLOSING THE CONTENTS. 6/7/2021

DRAWN BY: W.Tack DATE:

42" x 8' RCP TG

1 OF 1

SHEETS:

DO NOT SCALE